

CB Series Alarm Bells

Ordering Code:


CB	-	6	-	R	-	24
		Gong size				Voltage
		4	4 inch	-	Gray	6 6 VDC
		6	6 inch	R	Red	12 12 VDC
		8	8 inch			2 24 VDC
		10	10 inch			120 120 VAC
						240 220-240VAC




Specifications

Cat. No.	Volts	Amps (Rated)	Amps (Actual)	dB
CB-4-6	6V DC	0.50	0.10	86
CB-4-12	12V DC	0.60	0.20	86
CB-4-24	24V DC	0.30	0.08	86
CB-4-120	120V AC	0.5	0.05	86
CB-4-240	240V AC	0.10	0.03	86
CB-6-6	6V DC	0.50	0.10	86
CB-6-12	12V DC	0.85	0.20	86
CB-6-24	24V DC	0.30	0.08	86
CB-6R-24	24V DC	0.30	0.08	86
CB-6-240	240V AC	0.05	0.03	86
CB-8-6	6V DC	0.50	0.10	86
CB-8-12	12V DC	0.85	0.20	86
CB-8-24	24V DC	0.30	0.08	86
CB-8R-24	24V DC	0.30	0.08	86
CB-8-240	240V AC	0.05	0.03	86
CB-10-6	6V DC	0.50	0.10	86
CB-10-12	12V DC	0.85	0.20	86
CB-10-24	24V DC	0.30	0.08	86
CB-10R-24	24V DC	0.30	0.08	86
CB-10-240	240V AC	0.05	0.03	86

CB-4 (4 inch bell)

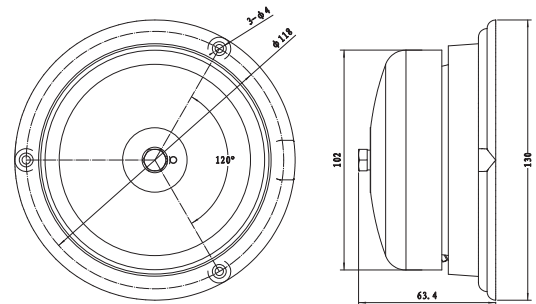

CB-6 CB-8 and CB-10 (6, 8, 10 inch bell)

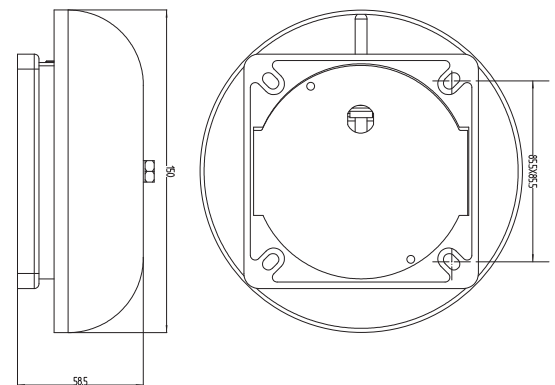

* UL 3R rated for outdoor applications when use with CB-BX.

Weather-Proof Back Box: Model CB-BX

